


## Application 適用車型

Suzuki Vitara/Escudo '15-Present

## Components 內含配件

① Strut brace 引擎室拉桿	1PCS
Bolt 螺絲 (M10x1.5x80)	2PCS
Nut 螺帽 (M10x1.5-17x10)	2PCS
Washer 華司 (20.8x10.7x2)	4PCS
② Bolt 螺絲 (M8x1.25x30)	4PCS
③ Nut 螺帽 (M8x1.25x12x6.5)	4PCS
④ Washer 華司 (16x8.4x1.4)	4PCS

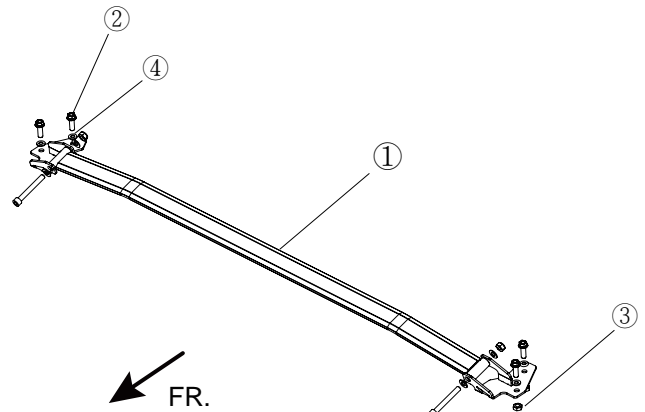

## Caution 注意事項

- Installation is recommended to be performed by licensed mechanics with necessary tools to ensure proper installation and safety, or damage to the product or vehicle may occur.
- Note the routing and position of wires and cables before installation. Please refer to factory manual.
- Tighten bolts and nuts firmly using handtools, or with specified torque if mentioned.
- 安裝需由合格的專業技師及工具執行以確保安裝正確及安全，否則可能對產品或車輛造成傷害。
- 安裝前請記下線路安裝路徑及位置，或請參考原廠手冊。
- 請使用手動工具確實鎖緊螺帽及螺絲，或依照說明中標註的扭力上鎖。

## Instructions 安裝說明

1. Open the hood, then Jack up the vehicle and remove front wheels to get access to the holes (2 for each side) on strut tower from both engine bay and inside of wheel arches.

打開引擎蓋並將車輛升起後拆卸前輪，同時從引擎室及輪拱內找到避震塔上左右邊各兩個孔。



2. Locate ① Strut brace on to the both sides of strut tower, then place supplied ② Bolts into the holes on strut tower with ④ Washers.

將①引擎室拉桿放置於避震塔上，並使用配件②螺絲及④華司置入兩側避震器塔上的孔中。



3. Tighten the bolts from inside of wheel arches using supplied ③ Nuts. Install the front wheels back.

使用③螺帽從輪拱內側鎖上已置入的螺絲，最後將前輪裝回。

